



**Fast-track floor preparation system for all resilient flooring and carpets, designed for heavy-duty projects and installations over wooden floors.**


- Exceptionally stable
- Provides a super smooth finish
- Ready for glue-down of all resilient and carpets
- Suitable for direct stick engineered wood
- Environmentally friendly
- TOG 2.1

Jumpax® Nature is a complete, eco-friendly subfloor system, specifically designed for projects requiring high performance and exceptional subfloor stability. Thanks to its unique composition, Jumpax® Nature offers outstanding resistance to both dynamic and static loads. Its high thermal resistance ensures excellent insulation for cold floors, while its significant acoustic properties make it an ideal subfloor system. It's also perfect for direct glue-down installations of engineered wood.

This versatile system can be used over nearly any type of floor construction and is particularly effective for quickly leveling wooden separation floors. Jumpax® Nature is

a free-floating, fast-track subfloor preparation system, suitable for glue-down installation of all resilient floor coverings, such as vinyl, LVT, linoleum, cork, rubber, as well as carpet and carpet tiles. At just 0,571" thick, it requires only basic tools and skills, yet provides a professional, super-smooth finish.

The system features two self-adhesive components that are quickly and easily installed as a free-floating subfloor, instantly smoothing out typical irregularities and eliminating the need for screeds, primers, plywood, or nails. There's no need to remove old floor coverings, loose screeds, or surface contaminants. Issues with problem substrates, minor cracks, or laitance are a thing of the past. A polyethylene sheet should be used underneath the product as a moisture barrier.

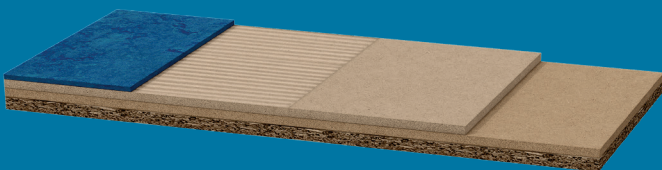

For us at Unifloor, the use of FSC® certified wood is very important. Environmentally and social appropriate use of the forest means that the forest's productivity, biodiversity and ecological processes are maintained while harvesting the wood. By using FSC wood, we are helping to promote responsible forest management. Therefore Unifloor solely uses raw materials from FSC certified sources.

**unifloor**  
UNDERLAY SYSTEMS USA

# PRODUCT SPECIFICATIONS



## TECHNICAL DATA

Article number	150.500
Thickness/Tolerance	0.157" / ± 0.008
Size	47.244" x 23.622"
Raw material(s) combinations	MDF, softboard
Colour	Natural/natural
Weight per package (lbs)	39,24
Humidity (%)	4-10
Swelling after 24 hours in water, max (%)	< 40
Fire class (according to EN13501: 2007)	
Nude test	D <sub>fl-s1</sub>
With 0.08" LVT measured from the top	B <sub>fl-s1</sub>
Thermal resistance TOG	2.1
Compressive strength (kPa) (according to EN 826 with 0.5 mm imprint)	586
Load test (according to DIN-EN-1991-1-1)	Class E1, E2 and E3
Sound insulation based on R <sub>w</sub> = 52 dB (according to ISO 717-1-2013)	
Nude test	R <sub>w</sub> = 56 dB (+ 4 dB reduction)
in combination with click LVT	R <sub>w</sub> = 58 dB (+ 6 dB reduction)
in combination with LVT	R <sub>w</sub> = 57 dB (+ 5 dB reduction)
in combination with linoleum	R <sub>w</sub> = 57 dB (+ 5 dB reduction)
Impact sound reduction on concrete floor (according to ISO 10140-3 2010)	
in combination with Cocofloor + engineered wood	21 dB ΔL <sub>w</sub>
in combination with Greenfloor + linoleum	21 dB ΔL <sub>w</sub>
Impact sound reduction on wooden floor (according to ISO 10140-3 2010 base from 65 dB)	
Nude test	6 dB ΔL <sub>n</sub>
in combination with 30 mm Ecopearls	16 dB ΔL <sub>n</sub>
in combination with click LVT	11 dB ΔL <sub>n</sub>
in combination with click laminate	10 dB ΔL <sub>n</sub>
VOC (Volatile Organic Compounds)	Class B
Formaldehyde degree	E-1
FSC certified	FSC C154437
EPD certified	EPD-Unifloor-260-EN

## APPLICATION

Fast-track floor preparation system for all resilient flooring and carpets, designed for heavy-duty projects and installations over wooden floors.

## PACK CONTENTS

# 3/3

- 3 base- and 3 top boards
- 47.244" x 23.622"
- 23,25 ft<sup>2</sup>
- Thickness 0.157"

## PACKAGING

Installation instructions included  
 Pallet contents 48 packs / 1,115.68 ft<sup>2</sup>  
 Pallet size (lwxh) 47.24"x47.24"x49.21"  
 Pallet weight 1874,93 lbs



Scan the QR code for more info about Jumpax® Nature!

Visit [www.unifloor-usa.com](http://www.unifloor-usa.com) for the most up-to-date information.